

Product Highlights

Power over Ethernet


Support for IEEE 802.3at/af Power over Ethernet (PoE) on ports 1 to 8 allows for powering of PoE-powered devices up to 250m and ports 9 to 16 up to 100M

PoE Power Budget

A large 150W PoE power budget and up to 30 W per port for simultaneously powering multiple PoE-compatible devices

Plug-and-play

Plug-and-play installation means the switch can be quickly and easily installed without the need for any additional configuration

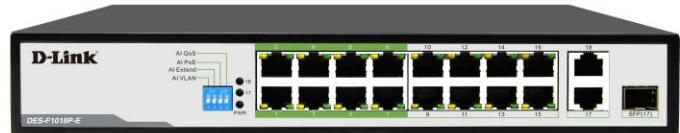

DES-F1018P-E

16 100Mbps 250m PoE + 1 Gigabit and 1 Combo Uplink 250m Poe Switch

Features

High-Speed Networking

- 16 10/100 Mbps Ethernet ports
- Full/half-duplex for Ethernet/Fast Ethernet
- 1 Gigabit Combo SFP port
- 1 Gigabit Uplink port

Functions

- VLAN
- EXTEND
- PoE
- QoS

Easy Setup

- Plug-and-play installation
- Auto MDI/MDI-X crossover on all ports

Stylish Design

- Noise-free operation
- Metal Casing Design

PoE Functionality

- Sixteen PoE ports
- IEEE 802.3af/at compliant
- 150W total power budget
- Up to 30 W power output per PoE port

The D-Link DES-F1018P-E 18 Port 10/100 Switch with 16 PoE Ports enables you to connect Power over Ethernet (PoE) devices such as wireless access points (APs), IP cameras, and IP phones to the network. The DES-F1018P-E can also connect other Ethernet devices like computers, printers, and a Network Attached Storage (NAS) to fit into any type of network application.

Power over Ethernet

DES-F1018P-E features sixteen 10/100 BASE-T ports that support the IEEE 802.3af and IEEE 802.3at PoE protocols, supplying up to 30W on each PoE port and Port 1-8 can support up to 250m, and providing a total power budget of 150W. You can connect compatible devices to the DES-F1018P-E without using an additional power supply. This allows you to save on cabling and to install devices in locations without immediate access to power outlets.

High Performance

The DES-1018P-E features plug and play installation and requires no configuration. Auto MDI/MDI-X support on all ports removes the need for crossover cables when connecting to another switch or hub, and auto-negotiation on each port intelligently adjusts the port speed for compatibility with the connected device. With wire speed filtering and store-and-forward switching, the DES-F1018P-E maximizes network performance while minimizing the transmission of bad network packets. With Gigabit combo uplink port, mean businesses can increase their network bandwidth using the speed of gigabit ethernet.

DES-F1018P-E

16 100Mbps 250mPoE + 1 Gigabit and 1 Combo Uplink 250m Poe Switch

Function

The DES-F1018P-E 18-Port 10/100 switch with 16 PoE ports, 6KV protected, is equipped with smart features with a switch of button such as

Extend - support up to 250m distance power supply

network storms and improve network performance smoother

VLAN - isolating ports 1-16 from each other can effectively supports network storms and improve network performance

QoS - Prioritize the identified video data to make video transmission smoother


Poe- Automatic detection power of port, power Off and Restart

Expand and Upgrade Your Network

The DES-F1018P-E offers an economical way for SOHO and small to medium businesses (SMB) to benefit from high-speed PoE networking.

It provides sixteen PoE ports and 1 Gigabit Combo UTP/SFP port for easy expansion of your network and supply power up to 250m* to your PoE devices. DES-F1018P-E, Port 1 - 8 can supply power (802.3 af/at) up to 250m distance at 10Mbps, cost-effective solution for your SMB requirement. Unmanaged switch with rich function (Extend, VLAN, QoS and PoE) provides a reliable connection to your company infrastructure.

Example Configuration

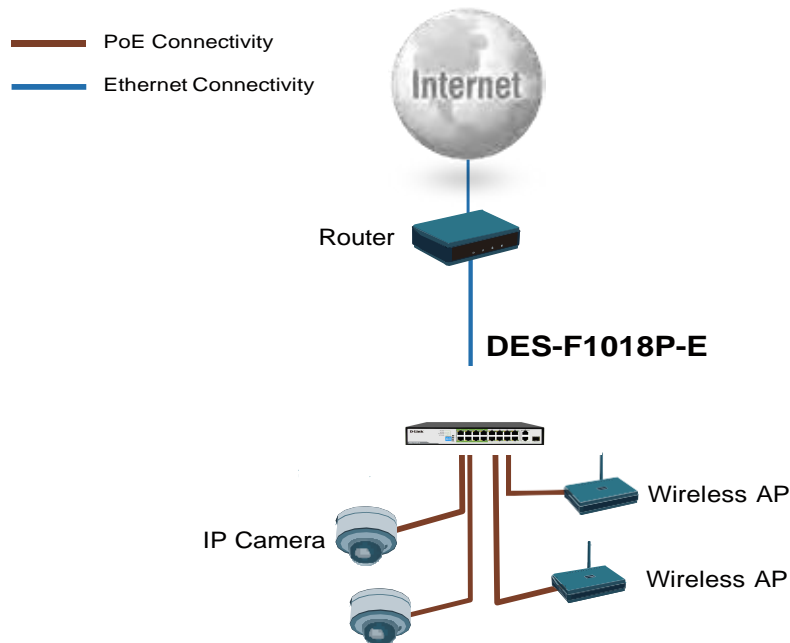

Technical Specifications

General

Size	• Desktop (with Mounting Kit)
Interfaces	• 16 10/100 BASE-T ports • 1 X Combo Gigabit UTP/SFP
Standards	• IEEE 802.3 10BASE-T Ethernet (twisted-pair copper) • IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper) • ANSI/IEEE 802.3 NWay auto-negotiation • IEEE 802.3x flow control
Media Interface Exchange	• Auto MDI/MDI-X adjustment on all ports
Lighting Protection	• 6KV
Performance	
Switching Fabric	• 7.2Gbps
Transmission Method	• Adopt Store-and-forward

DES-F1018P-E

16 100Mbps 250mPoE + 1 Gigabit and 1 Combo Uplink 250m Poe Switch

Data Transfer Rates	<div><div><div>• Gigabit Ethernet</div><div>• 100 Mbps</div></div><div><div>• Ethernet</div><div>• 10 Mbps</div></div></div>
Packet Filtering / Forwarding Rates	<div><div>• 10M port maximum 14800pps</div><div>• 100M port maximum 148800pps</div><div>• 1000M port maximum 1488000pps</div></div>
PoE	
PoE Standards	<div><div>• IEEE 802.3af</div><div>• IEEE 802.3at</div></div>
PoE-Capable Ports	<div><div>• Port 1 - 16 (Port 1 - 8 PoE can support up to 250m @ 10Mbps with Extend enabled)</div></div>
Power Budget	<div><div>• 150W (36 W max. per PoE port)</div></div>
LEDs	
Power	<div><div></div><div>✓</div></div>
Link/Activity	<div><div></div><div>✓</div></div>
Physical	
Weight	<div><div>• 2.5 kg</div></div>
Dimensions	<div><div>• 285 x 180 x 44 mm</div></div>
Power	<div><div>• External power adapter: 150W</div></div>
Temperature	<div><div>• Operating: 0 to 40 °C (32 to 104 °F)</div></div>
Humidity	<div><div>• Operating: 0% to 95% RH non-condensing</div><div>• Storage: 0% to 95% RH non-condensing</div></div>
Certifications	
Safety	<div><div>• LVD</div></div>
EMI/EMC	<div><div>• CE</div><div>• FCC</div></div>

Updated 2021/10/22