


Your Network Setup



Left Panel

Right Panel

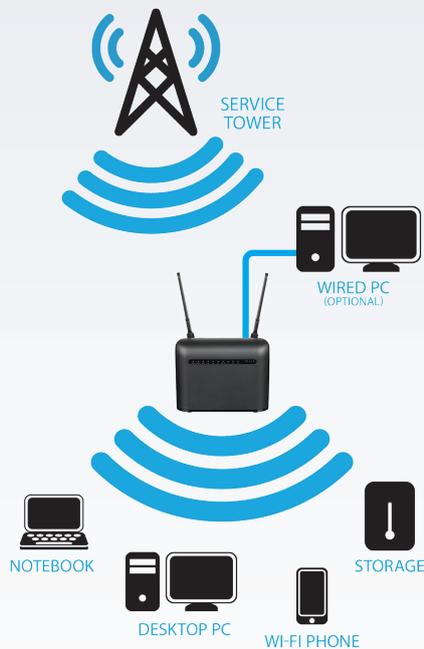

Technical Specifications

General

Frequency Support	<ul style="list-style-type: none"> LTE Bands: <ul style="list-style-type: none"> FDD: 1/2/3/5/7/8/20 (2100/1900/1800/850/2600/900/800 MHz) TDD: 38/40 (2600/2300MHz) 	<ul style="list-style-type: none"> UMTS <ul style="list-style-type: none"> 1/2/3/5/8 (2100/1900/1800/850/900 MHz) GSM/GPRS <ul style="list-style-type: none"> Quad-Bands (850/900/1800/1900 MHz)
Device Interfaces	<ul style="list-style-type: none"> 1 x 10/100/1000 Gigabit Ethernet WAN/LAN port 3 x 10/100/1000 Gigabit Ethernet LAN ports 	<ul style="list-style-type: none"> 2 x 4G LTE antennas
Data Rates ¹	<ul style="list-style-type: none"> LTE Downlink: Up to 150 Mbps¹ LTE Uplink: Up to 50 Mbps¹ 	<ul style="list-style-type: none"> DC-HSPA Downlink: Up to 42 Mbps¹ DC-HSPA Uplink: Up to 5.72 Mbps¹
Standards	<ul style="list-style-type: none"> IEEE 802.11ac/n/g/b IEEE 802.3 	<ul style="list-style-type: none"> IEEE 802.3u
Wi-Fi Data Rates	<ul style="list-style-type: none"> Up to 1200 Mbps with 802.11ac + 802.11n dual mode Up to 866 Mbps with 802.11ac clients¹ Up to 300 Mbps with 802.11n clients¹ 	<ul style="list-style-type: none"> 6/9/11/12/18/24/36/48/54 Mbps in 802.11g/a mode¹ 1/2/5.5/11 Mbps in 802.11b mode¹

Functionality

Wireless Encryption	<ul style="list-style-type: none"> 64/128-bit WEP (Wired Equivalent Privacy) 	<ul style="list-style-type: none"> WPA & WPA2 (Wi-Fi Protected Access)
Firewall	<ul style="list-style-type: none"> Network Address Translation (NAT) URL Blocking 	<ul style="list-style-type: none"> Stateful Packet Inspection (SPI) MAC Filtering

DWR-953V2 LTE Cat4 Wi-Fi AC1200 Router

Physical		
LED Status Indicators	<ul style="list-style-type: none">• Power• Internet• WWAN• 2.4 GHz• 5 GHz	<ul style="list-style-type: none">• WAN/LAN• SMS• LAN 1-3• Signal Strength
Dimensions	• 154 x 122 x 32 mm (6.06 x 4.8 x 1.26 in)	
Weight	• 275g (9.7oz)	
Temperature	• Operating: 0 to 40 °C (32 to 104 °F)	• Storage: -10 to 70 °C (14 to 158 °F)
Humidity	• Operating: 10% to 90% non-condensing	• Storage: 0% to 95% non-condensing
Certifications	• CE	• RoHS Compliant
Order Information		
<i>Part Number</i>	<i>Description</i>	
DWR-953V2	LTE Cat4 Wi-Fi AC1200 Router	

¹ Data rates are theoretical. Data transfer rate depends on network capacity, signal strength, and environmental factors.

Updated 2021/04/29