


How to login to DIR-868L router menu and change to admin password after update to Firmware 1.07SHC? (Starhub Firmware)


Note: Please ensure that you have the router wireless password which is on **the sticker label** at the base of the device.



Step 1: Open an Internet browser (such as Internet Explorer or FireFox) and enter `http://192.168.0.1` into the address bar.

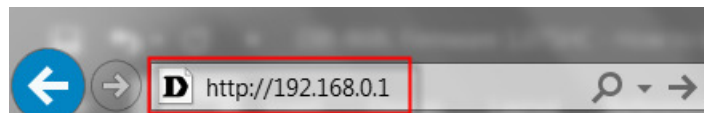

Step 2: The default username is Admin and the password is the same as the router wireless password entered. Click **Login**.

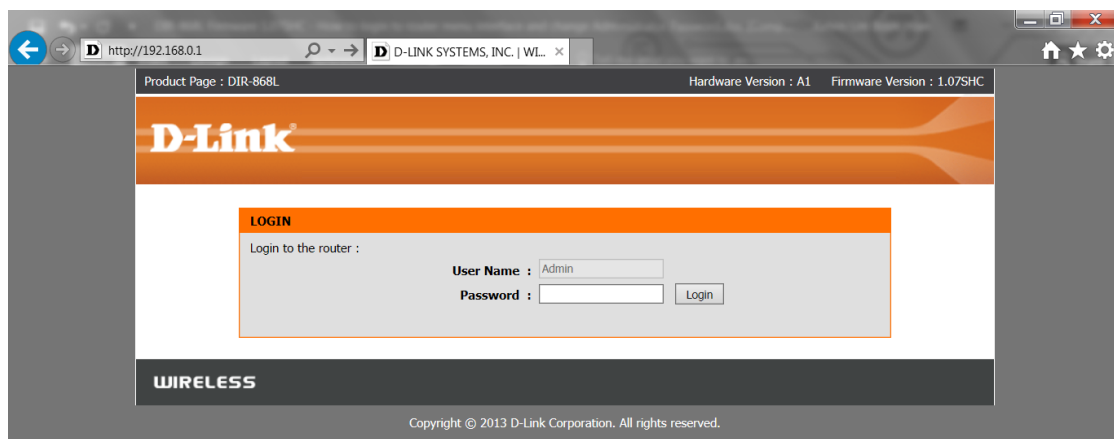

Step 3: Click the Tools tab at the top of the page and then click Admin from the menu on the left-hand side.

The screenshot shows the D-Link router's web interface. At the top, there is a navigation bar with tabs for SETUP, ADVANCED, TOOLS, STATUS, and SUPPORT. The TOOLS tab is selected. On the left, there is a vertical menu with options: ADMIN, TIME, SYSLOG, EMAIL SETTINGS, SYSTEM, FIRMWARE, DYNAMIC DNS, SYSTEM CHECK, and SCHEDULES. The ADMIN option is selected. The main content area is titled 'ADMINISTRATOR SETTINGS' and contains the following text: 'The 'admin' account can access the management interface. The admin has read/write access and can change password. By default there is no password configured. It is highly recommended that you create a password to keep your router secure.' Below this text are two buttons: 'Save Settings' (highlighted with a red box) and 'Don't Save Settings'. The next section is 'ADMIN PASSWORD' with the instruction 'Please enter the same password into both boxes, for confirmation.' It contains two input fields: 'Password :' and 'Verify Password :', both highlighted with red boxes. Below that is the 'SYSTEM NAME' section with a 'Gateway Name :' input field. At the bottom, there is an 'ADMINISTRATION' section. On the right side, there is a 'Helpful Hints...' sidebar with several bullet points providing additional information.

Step 4: To change the Administrator password, enter a new password in the **Password** field. Verify the password again in the **Verify Password** field.

Step 5: Click **Save Settings** to save the current configuration.

Note : For user upgrading from firmware 1.03 to firmware 1.07, the router will automatically do a factory reset after successful upgrade

Take note that all configuration will be lost after the factory reset.

--- END ---